



Europäisches  
Patentamt

European  
Patent Office

1804/52046

Office européen  
des brevets

REC'D 15 OCT 2004

WIPO EPT

Bescheinigung

Certificate

Attestation

Die angehefteten Unterlagen stimmen mit der ursprünglich eingereichten Fassung der auf dem nächsten Blatt bezeichneten europäischen Patentanmeldung überein.

The attached documents are exact copies of the European patent application described on the following page, as originally filed.

Les documents fixés à cette attestation sont conformes à la version initialement déposée de la demande de brevet européen spécifiée à la page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

03103863.1

**PRIORITY  
DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

Der Präsident des Europäischen Patentamts;  
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets  
p.o.

R C van Dijk



Europäisches  
Patentamt

European  
Patent Office

Office européen  
des brevets

Anmeldung Nr.:  
Application no.: 03103863.1  
Demande no:

Anmeldetag:  
Date of filing: 17.10.03  
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Koninklijke Philips Electronics N.V.  
Groenewoudseweg 1  
5621 BA Eindhoven  
PAYS-BAS

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:  
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.  
If no title is shown please refer to the description.  
Si aucun titre n'est indiqué se référer à la description.)

Apparatus for reproducing a digital information signal which is recorded on a  
first and a second layer of a record carrier

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s)  
revendiquée(s)  
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/  
Classification internationale des brevets:

G11B27/00

Am Anmeldetag benannte Vertragsstaaten/Contracting states designated at date of  
filing/États contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LU MC NL  
PT RO SE SI SK TR LI

Apparatus for reproducing a digital information signal which is recorded on a first and a second layer of a record carrier.

The present invention relates in general to the field of an apparatus for reproducing a digital information signal which is recorded on a first and a second layer of a record carrier, the digital information signal being divided into cells, each cell being recorded in at least one sector, the digital information signal comprising a first cell recorded on the first layer and a second cell recorded on the second layer, further being recorded on said record carrier control data indicating that the first and second cell have to be represented non-seamless after each other.

More particularly, the present invention relates to the field an apparatus for reproducing a digital information signal recorded on an optical record carrier such as a DVD-dual layer disc.

The invention further relates to a method of reproducing a digital information signal which is recorded on a first and a second layer of a record carrier, the digital information signal being divided into cells, each cell being recorded in at least one sector, the digital information signal comprising a first cell recorded on the first layer and a second cell recorded on the second layer, further being recorded on said record carrier control data indicating that the first and second cell have to be represented non-seamless after each other.

As is commonly known, an optical storage disc comprises at least one track, either in the form of a continuous spiral or in the form of multiple concentric circles, of storage space where information may be stored in the form of a data pattern. Optical discs are very successful, and several different types have been developed. One such type is DVD (Digital Versatile Disc), and the present invention relates particularly to DVD discs, more particularly to DVD-Video, for which reason the present invention will be explained in the following for DVD-Video discs having two layers. However, the gist of the present invention is also applicable to other types of recordable discs; therefore, the following description is not to be understood as limiting the scope of the present invention to DVD discs only.

Optical discs may be read-only type, where information is recorded during manufacturing, which information can only be read by a user. The optical storage disc may also be a writeable type, where information may be stored by a user. Such discs may be a write-once type, indicated as writable (R), but there are also storage discs where information can be written many times, indicated as rewritable (RW). In the case of DVD, a distinction can be made between two formats, i.e. DVD-RW and DVD+RW.

For reading information from the storage space of the optical storage disc, the track in a layer is scanned by an optical read beam. Since the technology of optical discs in general, and the way in which information can be stored in an optical disc, is commonly known, it is not necessary here to describe this technology in more detail.

Conventionally, an optical disc has only one storage layer containing a storage track. More recently, optical discs have been developed having two or even more storage layers, each storage layer containing a storage track in the shape of a spiral or multiple concentric circles. In such case, the logical storage space extends over multiple storage layers, hence the range of logical addresses extends contiguously over multiple storage layers. The transition from the last block of one storage layer to the first block of the next storage layer is such that the logical address is incremented only by 1.

A disc made according to the DVD Video Standard could have two layers. If the size of a movie is too large to be stored on one layer, a part is stored on the first layer and the remaining part is stored on the second layer.

According to the DVD Video Standard, data is organized in cells, and a transition from one layer to the next is only allowed at a cell boundary. This is related to the fact that, on reading video data from disc, it is desirable to have seamless continuation of video image display. Furthermore, according to the DVD Video standard, two Cells which are presented seamlessly shall be located on the same layer. Therefore, a disc according to the DVD-Video Standard where two cells need to be displayed after each other and which cells are recorded on different layers, these cells must be reproduced with a seam. The user will notice this as a visible hick-up in the video. DVD-authors try to mask this hick-up by taking a good point in the movie to have this seam. The seam is preferably on a scene change. However, a user is still able to notice the hick-up.

It is an important objective of the present invention to overcome said disadvantage.

It is an object of the invention to provide an arrangement with improved reproducing method.

The apparatus in accordance with the invention comprises

- reading means for reading the first cell from the first layer and the second cell from the
  - 5 second layer,
  - reading means for reading control data
  - control signal generation means for generating a control signal in dependence of the control data,
  - presentation means for presenting the first and second cell under control of the control
  - 10 signal,
- the control signal generating means being adapted to detect that the first cell is read from the first layer and the second cell is read from the second layer and generated a control signal indicating that the first and second cell have to be presented seamless in dependence of said detection.

- 15 The apparatus according to the invention reads the control data from the record carrier. According to said control data the first cell and the second cell have to be presented after each other. However due to restrictions in the DVD standard if two cells are located on different layers, these cells must be reproduced with a seam, this is indicated by the seamless play back flag in the control data. The apparatus according to the invention
- 20 determines whether the two cells are from two different layers. If this is the case, the apparatus assumes that the non-seamless reproducing flag is there due to the DVD-video standard and will forward to the presentation means a control signal indicating that the two cells have to be presented seamless.

- 25 In a further embodiment of the invention the control signal generating means is further adapted to detect that the first cell and the second cell are read from consecutive logical sector numbers and generated a control signal indicating that the first and second cell have to be presented seamless in dependence of the said detection and the detection that the first cell is read from the first layer and the second cell is read from the second layer. This is an additional test which verifies whether the cells are written contiguous in the logical
- 30 address space. When two cells have to be presented after each other and they are contiguously stored this is a clear indication that the non-seamless representation flag is there to satisfy the DVD-Video standard and that there was no reason to have this flag due to the video content and that the DVD-author did found this a good location to reproduce the two cells without a seam.

Embodiments of the invention will now be described in more detail, by way of example, with reference to the drawings, in which

5 figure 1 is a block diagram schematically illustrating a data storage system;  
figure 2A is a diagram schematically depicting a double-track storage space of  
a storage medium in a PTP case;  
figure 2B is a diagram schematically depicting a double-track storage space of  
a storage medium in an OTP case;  
10 figure 2C is a diagram schematically depicting a logical storage space;  
figure 3 is a diagram schematically depicting a logical storage space as well as  
a video sequence; and,

Figure 4 is a block diagram schematically illustrating a reproducing apparatus  
according to the invention.

15 Figure 1 is a block diagram schematically illustrating a data storage system 1,  
comprising a data storage medium 2, a medium access device 10, and a host device 20. In a  
typical practical implementation, the host device 20 may be a suitably programmed personal  
computer (PC); it is also possible that the data storage system 1 is implemented as a  
20 dedicated user apparatus such as a video recorder, in which case the host device 20 is the  
application part of such apparatus. In a specific embodiment, the data storage medium 2 is  
implemented as an optical disc, specifically a DVD, in which case the medium access  
device 10 is implemented as a disc drive. In the following, the invention will be described  
specifically for an optical disc implementation, but it is noted that the present invention is not  
25 limited to optical discs.

The optical disc 2 has a storage space 3, which has the form of two or more  
continuous spiral-shaped tracks or track in the form of multiple concentric circles, where  
information can be stored in the form of a data pattern. Since this technology is commonly  
known to persons skilled in the art, this technology will not be explained in further detail.

30 The several tracks of the storage space 3 are located in different storage layers  
of the optical disc 2, which storage layers will be indicated L0, L1, etc. Figure 2A is a  
diagram schematically depicting the storage space 3 as a collection of long ribbons, each  
ribbon corresponding to a storage layer L0, L1, for a case where the optical disc 2 has two  
storage layers. The storage space 3 is divided into a large number of blocks 4. Each block

has a physical address, which will hereinafter be indicated as PA. In figure 2A, the physical addresses PA are indicated underneath the blocks 4: in each storage layer L0, L1, the numbering of the physical addresses starts at zero (left-most block in figure 2A). Each following block has an address which is one higher than its previous neighbour. The last block has the highest address P0, P1. In case the two storage layers L0 and L1 have equal size,  $P0 = P1$ .

Most blocks also have a logical address, which will hereinafter be indicated as LA; in figure 2A, logical addresses are indicated above the blocks 4. It can be seen that numbering starts at  $LA=0$  for a certain block in L0, which typically is the block with  $PA=30000$  Hex.

The highest logical address in L0 is indicated as N; it can be seen that this is not necessarily the last block of L0.

The lowest logical address in the next storage layer L1 is  $LA=N+1$ , for a certain block in L1, which is not necessarily the first block; typically, this is the block with  $PA=30000$  Hex in L1, i.e. the same physical address as the first logical address  $LA=0$  in the first storage layer L0, but this is not essential.

The highest logical address is indicated as N; it can be seen that this does not necessarily corresponds to the last block of L1.

In the first logical layer L0, when comparing two blocks, the one with the highest logical address also has the highest physical address. In figure 2A, the same applies to the second storage layer L1; such configuration is indicated as Parallel Track Path (PTP). Figure 2B is a diagram comparable to figure 2A, for a case of an Opposite Track Path (OTP) configuration, in which case increasing logical addresses corresponds to decreasing physical addresses. In that case, the radial location of block  $LA=N$  in L0 corresponds to the radial location of block  $LA=N+1$  in L1, as indicated.

The blocks having a logical address together define the logical storage space (LSS). Figure 2C is a diagram schematically depicting the LSS as one long continuous ribbon. In the LSS, the addresses range from zero to M. When the host device 20 wants to access a certain piece of information, it sends a request to the disc drive 10, indicating the corresponding logical address. The disc drive 10 comprises a memory 11, which contains information regarding the relationship between logical addresses LA and physical addresses PA, for instance in the form of a look-up table. Based on this information, the disc drive 10 determines which storage layer and which physical address correspond to the required logical address.

On a DVD blocks with  $PA < 30000$  Hex are used for the lead-in area. The lead-in area is used to store disc specific information, such as the number of layers, the size of L0, and the last physical address PA, which corresponds to the location of the block with logical address M. It should be noted the size of L0 could be expressed in the number of logical blocks on L0 or the last physical address PA which corresponds to the location of the highest logical address in L0. The disc drive 10 is able to read the information stored in the lead-in area. Furthermore is in the lead-in area specified the physical address in which the logical storage space begins, this is the logical block with  $LA=0$ . On a DVD disc the physical address is 30000 Hex.

Figure 3 is a diagram comparable to figure 2C, showing the LSS, and also showing schematically a video sequence 30, for instance corresponding to a movie, also illustrated as a ribbon, which extends from a location in L0 to a location in L1. The video sequence 30 has a start 31 and an end 39. The data of the video sequence 30 define video cells 35; cell boundaries between the video cells 35 are indicated at 34. With respect to "video cells", reference is made to part III of the DVD video specification. A video cell comprises a part of the video stream with a presentation time in the range of 0.4 - 1.0 second and is a multiplex of the video, audio and graphic signals. According to the DVD-video specification a cell must be located on the same layer. Furthermore, two cells which are presented seamlessly shall be allocated on the same layer. Therefore, the cell boundary 34 corresponds to the layer jump position from L0 to L1. Furthermore, the first block of the cell on L1 has a logical address N+1 and the last block of the preceding cell in the video sequence has a logical address N.

In figure 1, a host/drive communication link between host device 20 and disc drive 10 is indicated at 5. Likewise, a drive/disc communication link between disc drive 10 and disc 2 is indicated at 6. The drive/disc communication link 6 represents the physical (optical) read/write operation as well as the physical addressing of blocks 4 of the storage space 3. The host/drive communication link 5 represents a data transfer path as well as a command transfer path.

Figure 4 is a block diagram illustrating a reproducing apparatus 400 according to the invention. The apparatus comprises a first reading unit 40 for reading control data from the record carrier 2. These control data defines conditions from which the reproducing apparatus determines how to play back a digital information signal recorded on the record carrier 2. The control data read is supplied to a control signal generator unit 42. The control data enables a presentation unit 46 to determine the first logical address of a cell and the last



- logical address of a cell in the logical storage space, this information is used to instruct a reading unit 44 to read the logical blocks corresponding to said cell from the logical storage space. A person skilled in the art knows how to calculate these logical addresses from the control data on a DVD. Furthermore is defined for each cell by means of a Seamless
- 5 playback flag whether said cell shall be presented seamlessly or not after presentation of the previous cell. In a prior art DVD-player this flag is passed to a presentation unit 46. The apparatus further comprises a second reading unit 44 for reading the digital information signal from the record carrier 2. The digital information signal is a multiplexed stream comprising the video, audio and graphic signals. The digital information signal is sub-
- 10 divided into a sequence of cells which are stored in blocks on the record carrier. The digital information signal read from the record carrier is supplied to an input of the presentation unit 46. The presentation unit 46 is arranged to decode the video, audio and graphics signals in the digital information signal and to combine the respective signals so as to obtain an output signal 48 to be supplied to a display device, such as a TV, LCD or Beamer. The control data
- 15 read by reading unit 40 is supplied to the control signal generator unit 42, which determines in dependence of the control data the way the content of the digital information signal should be decoded and presented by the presentation unit 46. The first and second reading unit of figure 4 are normally part of the disc drive 10 of figure 1. The control signal generator unit 42 and the presentation unit 46 in figure 4 are normally part of the host device 20 in figure 1.
- 20 However depending on the implementation some function could be performed in the host device or the disc drive.

- The first reading unit 40 is further arranged to read information from the lead-in area of an optical disc. In dependence of this information the reproducing apparatus
- 25 400 is able to determine on which layer a cell is stored. The size of the first layer could be defined by the parameter  $LO_{size}$ . If  $LO_{size}$  is defined to be the logical address of last block on the first layer  $L0$ , is  $N$  in figure 2, a cell is located on the first layer if the logical address of the first block of said cell is in the range  $[0...N]$  and a cell is located on the second layer if the logical address of the first block of said cell is in the range  $[N+1...M]$ , where  $M$  is
- 30 sequence number of the last block in the logical storage space LSS. If  $LO_{size}$  is defined to be the physical address of the last block used by the logical storage space on the first layer then the apparatus further has to know the physical address of the first block used by the logical storage space on the first layer  $L0$ . The difference between the number of the last physical address used by the logical storage space and the number of the first physical address used by

the storage space defines the range of the logical addresses on the first layer. On a DVD the first physical address used by the logical storage space is 30000 Hex.

5 In dependence of the start address of the logical addresses used by a first cell of two subsequent cells and the logical addresses used by a second cell of said two subsequent cells and the parameter  $LO_{size}$  the control signal generator unit 42 detects whether the first cell is read from the first layer and the second cell is read from the second layer. If this is the case, according to the DVD-standard the seamless playback flag in the control data read from the record carrier, indicates that the two cells shall be presented with a seam. As said flag is normally set due to the standard and not that said cells could not be presented  
10 seamlessly in the apparatus according to the invention the control signal generates upon said detection a control signal that indicates that the first and the second cell have to be presented seamless. Under control of said control signal generated the presentation unit 46 presents the first and second cell seamlessly.

In a further embodiment of the reproducing apparatus the control signal  
15 generating unit 42 is further adapted to detect that the first cell and the second cell are read from consecutive logical sector numbers and generates a control signal indicating that the first and second cell have to be presented seamless in dependence of the said detection and the detection that the first cell is read from the first layer and the second cell is read from the second layer. The detection on which layer the first and second cell is stored is equivalent as  
20 described above. The control signal generator unit 42 detects whether the first and the second cell are read from blocks having consecutive logical sector numbers by retrieving from the control a first parameter  $C\_LVOBU\_EA$  indicating the address of the last logical block of the first cell and a second parameter  $C\_FVOBU\_SA$  indicating the address of the first logical block of the second cell and determining whether the first parameter and the  
25 second parameter have subsequent address values.

Though the invention is described with reference to preferred embodiments thereof, it is to be understood that these are non-limitative examples. Thus, various modifications are conceivable to those skilled in the art, without departing from the scope of the invention, as defined by the claims. For example, in case of a disc with the multi-angle  
30 feature, a scene could be prosecuted in several variants. All these scenes could be meant to be seamlessly reproduced, however due the layer dump each of the cells, representing a variant, that should be represented after a first cell, could be stored on the other layer as the first cell. Therefore, two cell that have to be presented seamlessly does not necessarily to be stored in subsequent blocks.

The use of the verb "to comprise" and its conjugations does not exclude the presence of elements or steps other than those stated in a claim. Furthermore, the use of the article "a" or "an" preceding an element does not exclude the presence of a plurality of such elements. In the claims, any reference signs placed between parenthesis shall not be  
5 construed as limiting the scope of the claims. The invention may be implemented by means of hardware as well as software. Several "means" may be represented by the same item of hardware. Furthermore, the invention resides in each and every novel feature or combination of features.

## CLAIMS:

1. Apparatus for reproducing a digital information signal which is recorded on a first and a second layer of a record carrier, the digital information signal being divided into cells, each cell being recorded in at least one sector, the digital information signal comprising a first cell recorded on the first layer and a second cell recorded on the second layer, further  
5 being recorded on said record carrier control data indicating that the first and second cell have to be represented non-seamless after each other, the apparatus comprising:  
- reading means for reading the first cell from the first layer and the second cell from the second layer,  
10 - reading means for reading control data  
- control signal generation means for generating a control signal in dependence of the control data,  
- presentation means for presenting the first and second cell under control of the control signal,  
15 characterized in that the control signal generating means is adapted to detect that the first cell is read from the first layer and the second cell is read from the second layer and generated a control signal indicating that the first and second cell have to be presented seamless in dependence of said detection.
- 20 2. Apparatus as claimed in claim 1, the layers of said record carrier comprising sectors wherein each sector has a unique logical sector number and the sectors being numbered in consecutive ascending order, the first cell being recorded in consecutive sectors and the second cell being recorded in consecutive sectors subsequent to the sectors of the first cell, characterized in that the control signal generating means is further adapted to detect that  
25 the first cell and the second cell are read from consecutive logical sector numbers and generates a control signal indicating that the first and second cell have to be presented seamless in dependence of the said detection and the detection that the first cell is read from the first layer and the second cell is read from the second layer.

3. Apparatus as claimed in claim 1 or 2, characterized in that the apparatus is arranged for reproducing a digital information signal which is recorded on a first and a second layer of a record carrier according to a DVD-standard.

5 4. Method for reproducing a digital information signal which is recorded on a first and a second layer of a record carrier, the digital information signal being divided into cells, each cell being recorded in at least one sector, the digital information signal comprising a first cell recorded on the first layer and a second cell recorded on the second layer, further being recorded on said record carrier control data indicating that the first and second cell have to be represented non-seamless after each other,  
10 the method comprising the steps of:

- reading the control data
- reading the first cell from the first layer and the second cell from the second layer,
- detect that the first cell is read from the first layer and the second cell is read from the
- 15 second layer so as to obtain a first detection signal,
- generating a control signal indicating that the first and second cell have to be presented seamless in dependence of said first detection signal so as to substitute the control data read from the record carrier, and
- presenting the first and second cell under control of the control signal.

20

5. Method as claimed in claim 4, the layers of said record carrier comprising sectors wherein each sector has a unique logical sector number and the sectors being numbered in consecutive ascending order, the first cell being recorded in consecutive sectors and the second cell being recorded in consecutive sectors subsequent to the sectors of the first

25 cell, wherein the method further comprises the step

- detecting that the first cell and the second cell are read from consecutive logical sector numbers so as to obtain a second detection signal, and the generating step is adapted to generated a control signal indicating that the first and second cell have to be presented seamless in dependence of the said first detection signal and said second detection signal.

30

6. Method as claimed in claim 4 or 5, characterized in that the method is arranged for reproducing a digital information signal which is recorded on a first and a second layer of a record carrier according to a DVD-standard.

## ABSTRACT:

The invention relates to an apparatus for reproducing a digital information signal which is recorded on a first and a second layer of a record carrier, the digital information signal being divided into cells, each cell being recorded in at least one sector, the digital information signal comprising a first cell recorded on the first layer and a second cell  
5 recorded on the second layer, further being recorded on said record carrier control data indicating that the first and second cell have to be presented non-seamless after each other. The apparatus is arranged to detect that the first cell is read from the first layer and the second cell is read from the second layer and generated a control signal indicating that the first and second cell have to be presented seamless in dependence of said detection. In this  
10 way the control data indicating that the cells have to be presented with a seam is replaced with a control signal indicating that the cells have to presented seamlessly. This results in an improved presentation of the digital information signal at a layer break.

Fig. 4.

1/2

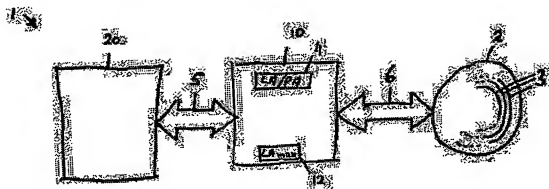


FIG. 1

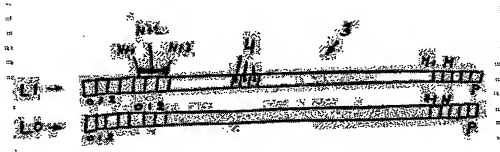


FIG. 2A



FIG. 2B

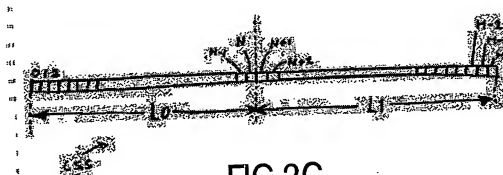


FIG. 2C

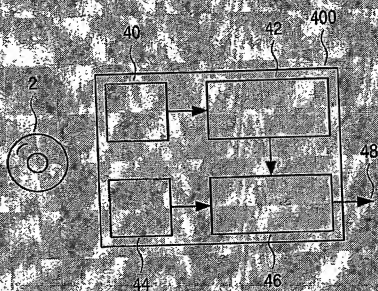


Fig. 4

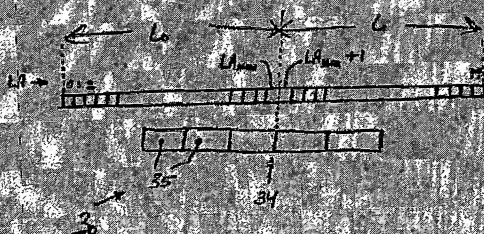


FIG 3



**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**